

- A、适用于回流焊
- B、适用于高密度表面组装
- C、性能稳定，可靠性高。
- D、寿命：125℃，1000小时
- A、Reflow soldering is available
- B、Available for high density surface mounting
- C、High stability and reliability
- D、Lifetime:125℃,1000Hr




### ※ 主要技术性能 Specifications

使用温度范围 Operating Temperature Range	-40~+125℃																		
额定电压范围 Rated Voltage Range	10~50V DC																		
标称容量范围 Nominal Capacitance Range	10~330μF																		
标称容量允许偏差 Capacitance Tolerance	±20%(120Hz,20℃)																		
漏电流 (20℃) Leakage Current	1≤0.01C <sub>r</sub> U <sub>r</sub> (μA)或3μA取较大者 (2分钟) 1≤0.01C <sub>r</sub> U <sub>r</sub> (μA) or 3μA Whichever is greater(after 2 minutes)																		
损耗角正切值 Dissipation Factor(120Hz20℃)	<table border="1"> <tr> <td>U<sub>r</sub>(V)</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>tgδ</td> <td>0.32</td> <td>0.24</td> <td>0.21</td> <td>0.18</td> <td>0.18</td> </tr> </table>	U <sub>r</sub> (V)	10	16	25	35	50	tgδ	0.32	0.24	0.21	0.18	0.18						
U <sub>r</sub> (V)	10	16	25	35	50														
tgδ	0.32	0.24	0.21	0.18	0.18														
温度特性 (120Hz) Temperature Characteristics Impedance Ratio(120Hz)	<table border="1"> <tr> <td>U<sub>r</sub>(V)</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Z<sub>arc</sub>/Z<sub>iso</sub></td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z<sub>arc</sub>/Z<sub>arc</sub></td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> </tr> </table>	U <sub>r</sub> (V)	10	16	25	35	50	Z <sub>arc</sub> /Z <sub>iso</sub>	3	2	2	2	2	Z <sub>arc</sub> /Z <sub>arc</sub>	6	4	4	3	3
U <sub>r</sub> (V)	10	16	25	35	50														
Z <sub>arc</sub> /Z <sub>iso</sub>	3	2	2	2	2														
Z <sub>arc</sub> /Z <sub>arc</sub>	6	4	4	3	3														
耐久性 Load Life	<p>+125℃施加额定电压1000小时，恢复16小时后，电容量应满足要求 After applying rated voltage for 1000 hours at+125℃ and then resumed 16 hours.The capacitor shall meet the following limits.</p> <table border="1"> <tr> <td>电容量变化率 Capacitance change</td> <td>≤±30%初始值 ≤±30%of initial measured value</td> </tr> <tr> <td>漏电流值 Leakage</td> <td>≤初始规定值 ≤Initial specified value</td> </tr> <tr> <td>损耗角正切值 Dissipation factor</td> <td>≤300%初始规定值 ≤300%of initial specified value</td> </tr> </table>	电容量变化率 Capacitance change	≤±30%初始值 ≤±30%of initial measured value	漏电流值 Leakage	≤初始规定值 ≤Initial specified value	损耗角正切值 Dissipation factor	≤300%初始规定值 ≤300%of initial specified value												
电容量变化率 Capacitance change	≤±30%初始值 ≤±30%of initial measured value																		
漏电流值 Leakage	≤初始规定值 ≤Initial specified value																		
损耗角正切值 Dissipation factor	≤300%初始规定值 ≤300%of initial specified value																		
高温贮存 Shelf Life	<p>+125℃,1000小时，恢复16小时后，电容器应满足下列要求。 After storage for 1000 hours at+125℃ and then resumed 16 hours, the capacitor shall meet the following limits.</p> <table border="1"> <tr> <td>电容量变化率 Capacitance change</td> <td>≤±30%初始值 ≤±30%of initial measured value</td> </tr> <tr> <td>漏电流值 Leakage</td> <td>≤2倍的初始规定值 ≤200%of initial specified value</td> </tr> <tr> <td>损耗角正切值 Dissipation factor</td> <td>≤300%初始规定值 ≤300%of initial specified value</td> </tr> </table>	电容量变化率 Capacitance change	≤±30%初始值 ≤±30%of initial measured value	漏电流值 Leakage	≤2倍的初始规定值 ≤200%of initial specified value	损耗角正切值 Dissipation factor	≤300%初始规定值 ≤300%of initial specified value												
电容量变化率 Capacitance change	≤±30%初始值 ≤±30%of initial measured value																		
漏电流值 Leakage	≤2倍的初始规定值 ≤200%of initial specified value																		
损耗角正切值 Dissipation factor	≤300%初始规定值 ≤300%of initial specified value																		
耐焊接热 Resistance to soldering Heat	<p>在250℃的条件下，电容器应在热板上保持30秒，然后从热板上取出电容器，让其在室温下恢复，电容器应满足以下要求： The capacitors shall be kept on the hot plate maintained at 250℃for 30 seconds.After removing from the hot plate and restored at room temperatue, then meet the following requirement.</p> <table border="1"> <tr> <td>电容量变化率 Capacitance change</td> <td>≤±10%初始值 ≤±10%of initial measured value</td> </tr> <tr> <td>漏电流值 Leakage</td> <td>≤初始规定值 ≤Initial specified value</td> </tr> <tr> <td>损耗角正切值 Dissipation factor</td> <td>≤初始规定值 ≤Initial specified value</td> </tr> </table>	电容量变化率 Capacitance change	≤±10%初始值 ≤±10%of initial measured value	漏电流值 Leakage	≤初始规定值 ≤Initial specified value	损耗角正切值 Dissipation factor	≤初始规定值 ≤Initial specified value												
电容量变化率 Capacitance change	≤±10%初始值 ≤±10%of initial measured value																		
漏电流值 Leakage	≤初始规定值 ≤Initial specified value																		
损耗角正切值 Dissipation factor	≤初始规定值 ≤Initial specified value																		

### ※ 外形图及尺寸

Case size table

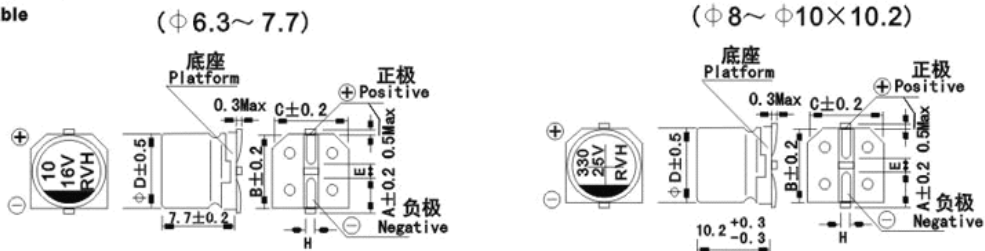

	φ6.3×7.7	φ8×10.2	φ10×10.2
A	2.5	2.9	3.2
B	6.6	8.3	10.3
C	6.6	8.3	10.3
E	1.8	3.1	4.2
L	7.7	10.2	10.2
H	0.5~0.8	0.8~1.1	

※ 标称电容量、额定电压、额定纹波电流与外形尺寸对应表

Nominal capacitance, rated voltage, rated ripple current and case size table

WV μF	10		16		25		35		50	
	D×Lmm	125°CmA	D×Lmm	125°CmA	D×Lmm	125°CmA	D×Lmm	125°CmA	D×Lmm	125°CmA
10									6.3×7.7	25
22									6.3×7.7	50
33							6.3×7.7	53	8×10.2	74
47					6.3×7.7	56	8×10.2	79	10×10.2	94
100	6.3×7.7	62	8×10.2	89	8×10.2	84	10×10.2	101		
220	8×10.2	93	10×10.2	113						
330	10×10.2	118								

额定纹波电流 Rated ripple current: (mA, 125°C, 120Hz)

NOTE: All designs and specifications are for reference only and are subject to change without prior notice. If any doubt about safety for your application, Please contact us immediately for technical assistance before purchase

注:以上所提供的设计及特性参数仅供参考,任何修改不作预先通知,如在使用上有疑问,请在采购前与我们联系,以便提供技术上的协助。